

DL SERIES **Digital Level**



Features

- Advanced Accuracy
- Trigger Key Function
- 3.0 Inch Colorful Touch Screen for DL-2003A
- Magnetical-damped Compensator
- Multiple Data Transform
- Bluetooth Remote Control for DL-2003A



DL-2003A




DL-2007




DL-202

Software

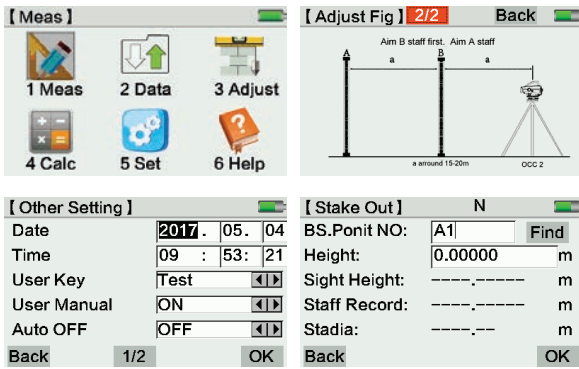


Intelligent On-board System for DL-2003A

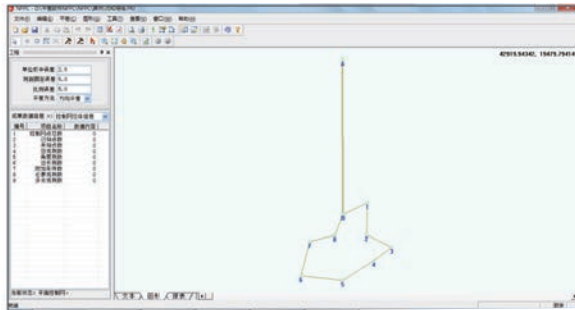

Powerful Post-processing Software

It contains adjustment routines for dynamic adjustment of horizontal & vertical control network and angle & direction adjustment.

Easily zoom in or out to see the overall data in graphic.

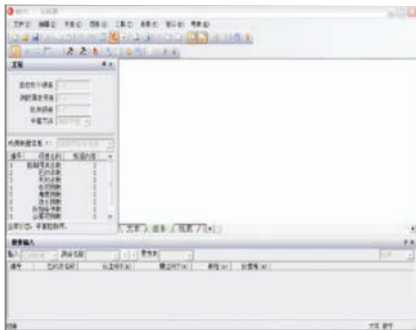

Seamless Transfer with Various Data Formats

Station	SD Length	AccHeightLength	SD Set	d	Height
1	30.2335	30.2335	0.1135	0.1135	
2	54.682	89.9155	-0.262	-0.1485	
3	48.915	138.8305	-0.537	-1.0865	
4	35.688	173.5185	-0.458	-1.5435	
5	37.1895	211.1080	-0.615	-2.2350	
6	55.129	266.2470	0.721	-1.5049	
1	55.1439	55.1439	-0.7269	-0.7269	
2	37.1975	92.3405	0.5879	-0.5879	
3	35.1025	127.4430	0.4803	-0.3790	
4	48.9055	176.3485	1.0975	1.4260	
5	54.6479	230.9964	0.2240	1.6660	
6	35.2179	266.2125	-0.3060	1.3340	

Precision Analysis & Report

The DL Data Download & Processor Software, makes the field work easier to display the complex leveling tasks.

Specifications

Item		DL-2003A	DL-2007	DL-202
Height Accuracy (standard deviation for 1km double run leveling)	Digital Reading	0.3mm	0.7mm	1.5mm
	Optical Reading	2.0mm		
Distance Accuracy	Digital Reading	D≤10m:10mm;D>10m:D*0.001		
Distance Range	Digital Reading	2m~110m		
Minimum Display	HD	0.01mm/0.1mm/1mm	1mm/0.1mm	0.1mm/1mm
	Distance	0.1/1cm		
Measuring Time		within 3s in normal condition		
Telescope	Magnification	32X		
	Resolving Power	3"		
	Field of View	1°30'		
	Multiple Constant	100		
	Additive Constant	0		
Compensator	Type	magnetic-damped		
	Range	≥±12'		
	Accuracy	0.20"/1'	0.30"/1'	0.50"/1'
Data Storage (for only DL-201, DL-2007)	Storage	128MB	16MB	
	Point Name	increasing/decreasing/customized		
	Connection	RS232/Bluetooth	USB	
	External Storage	U disk	SD Card	--
Circular vial Accuracy		8'/2mm		
Display		3.0 inch LCD Colorful Touch Screen	160*64dpi LCD with illumination	128*32dpi LCD with illumination
Working Temperature		-20℃~50℃		
Dimension		230mmX225mmX203mm	230mmX150mmX210mm	
Weight		3.1kg	2.5kg	
IP Standard		IP65	IP54	

* COLOR AND DESIGN MAY VARY.

Invar Staff NSI-20M Specification

1	Circle Bubble		≤12'/2mm
2	Surface curvature distinction		≤4mm
3	Vertical of central axis and underside		≤5'
4	Tolerance of zero point		≤0.05mm
5	Basic barcode graduation tolerance	Deviation	≤0.02mm
		Standard deviation	≤0.013mm
6	Interval tolerance		≤0.04mm

SOUTH
Target your success

SOUTH PRECISION INSTRUMENT PVT. LTD.

Add: 1111,11th Floor, RG Trade Tower, Plot No.B-7 Netaji Subhash Place,

Pitampura, Delhi-110034 Tel; 011-49995999, Mob:+91-9999999255

www.southprecision.in

CUSTOMER SERVICE SUPPORT:

AHMEDABAD

CHENNAI

HYDERABAD

INDORE

KOLKATA

MUMBAI